

Metalized Film Capacitor

: CBB65A

: 2024.01.11

: 1

Motor Run Capacitor
Type: CBB65A

: 2024.01.11

: 1



1

- : **Constructions**

- : **Features**
-

- : **Application**






- : **Terminals**
250# (2+2) / (4+4) ----6.3*0. 2+2/4+4 -







- : **Mounting parts**
/ ()

	/ 3667.1-2016 ; 60252-1 ; 10
	2
	(10000)
	250 ; 450
	5% ()
	50/60



	， ， ； 。
	。
	±5%
δ	0 10 ⁻⁴ 1 ， 20℃
- ()	2 2
- ()	2500 2
	10000 20℃， 65%
	1000 1.35 ， 5℃
	10 (200 /) 1.3 ，
/	10 /
	21

	315415 10000
	250 ， 5-120 ， ， 5℃ 450 ， 3- 0 ， ， 5℃
	250 ， 1-150 ， ， 5℃ 450 ， 1-100 ， ， 5℃
	2014/35/
	2.0

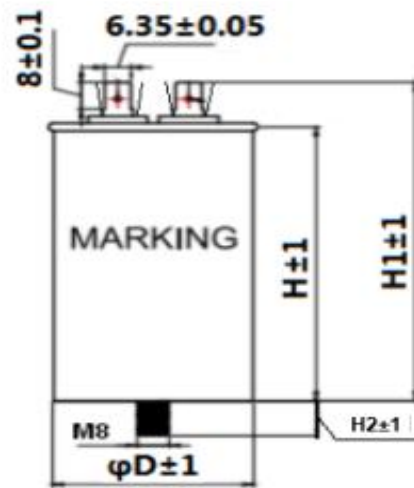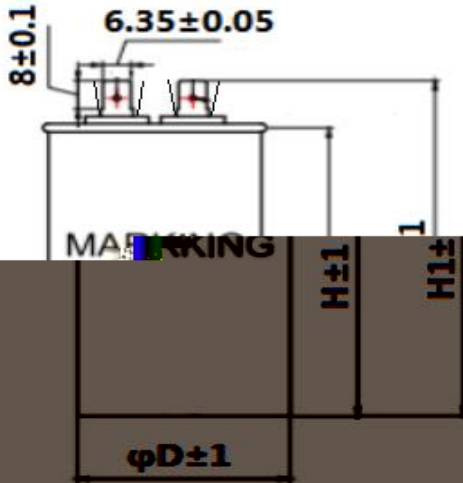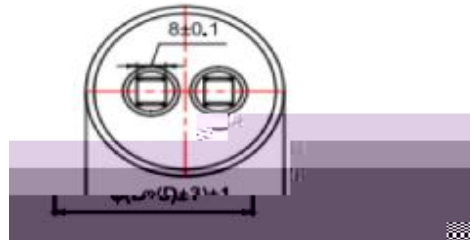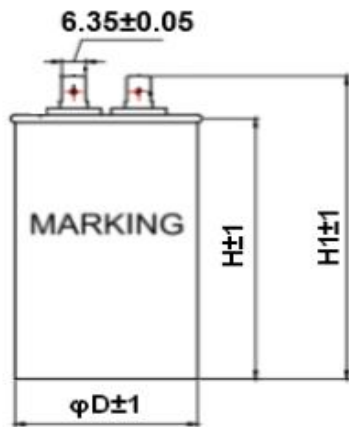


VAC	μF	D mm	H mm	H1 mm	H2 mm	Part No.	
	10	40	55	67	12	45010	50
	15	40	55	67	12	45015	50
	20	40	65	77	10	45020	50
	25	40	65	77	10	45025	50
	30	40	75	7	10	45030	50
	35	40	5	7	10	45035	50
250	40	40	5	7	10	45040	50
	50	45	5	7	10	45050	50
	60	70					

0



6

包装方式如图所示, 十字隔板包装

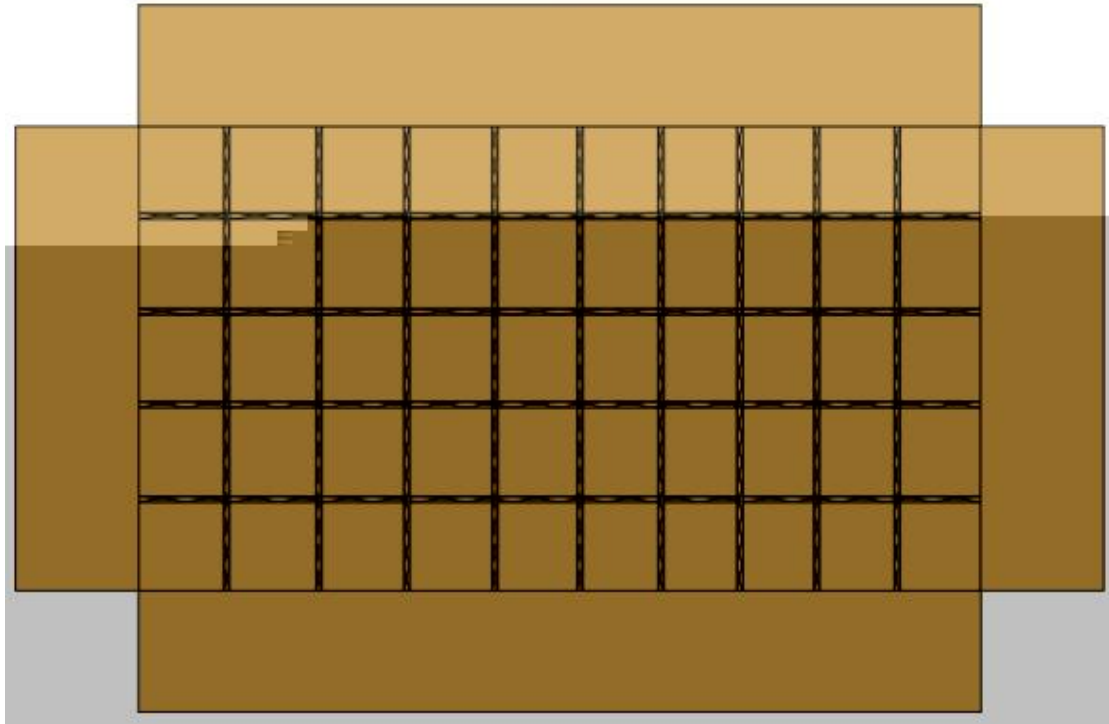

: 2,000

2000 .

: 卞

: -40°C + 5°C

: -40°C + 5°C

: 1.1

: 1.1

: 1.3

: 1.3

: 1.35

: 1.35


-10°C +40°C、

70% 、

-10°C +40°C,

70% ,



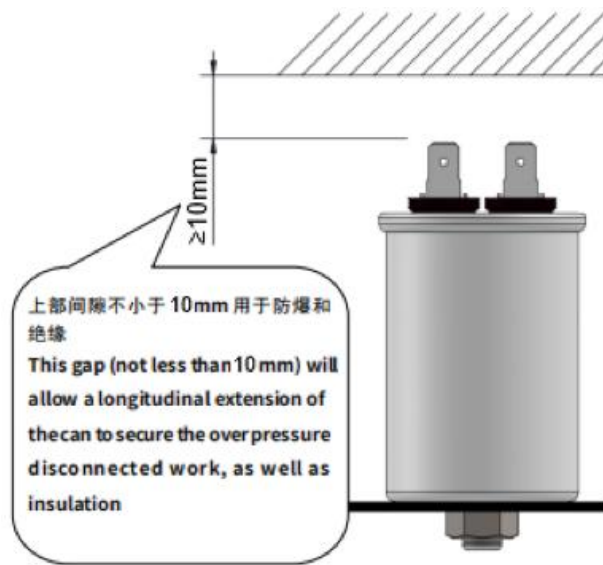

2.0

2.0