



:

:

:

:

:

:







:
:
低 保
保
主 :
:
() ()
:

	; ;
偏	()











	, , ;
	o
	o
	±
值 δ	, °C
(两 之)	
(与 之)	
	°C, 于
久	, °C, 作
	()
	,





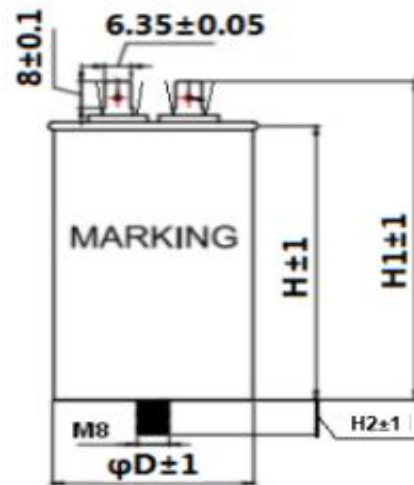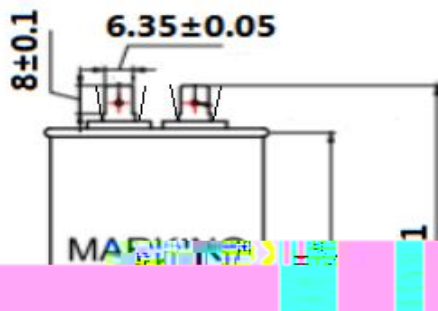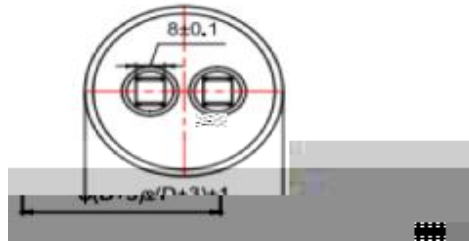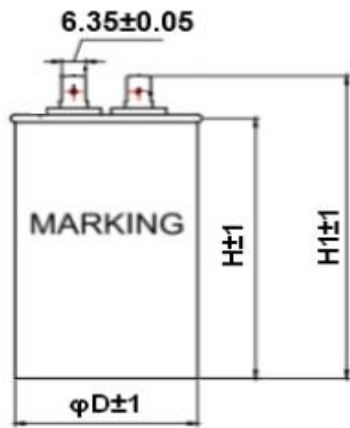

信 ()

SHONGE®
CBB65A-MS S2
200 μF ±10% 250VAC
50/60Hz
IEC 60252-2
1min/1.7%
PROTECTED 10000AFC
RoHS HSSG Lot No.
 Part No.

	产
	偏
	候
	保
	作
	产
	产






(例)

	μ						



包装方式如图所示, 十字隔板包装

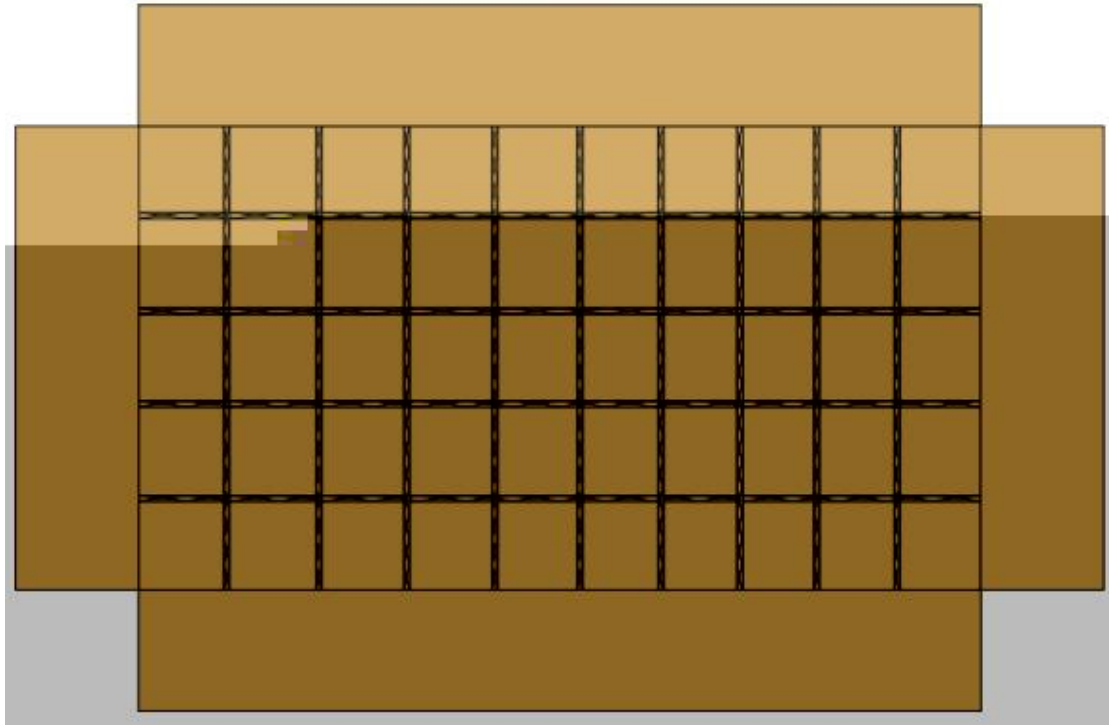

使 件

: 不

: 下

: °C °C : °C °C

: :

: :

: :

中 他 为 °C °C、 不 于 、

°C °C

使



使，不使；使；为保，佳下，使；使。

中，会使，、、
、、、、以一些。仅仅
、、，于久，
不代保。下。，仅作为，

佳

仓作产。但不，于两严，产
。但。不会产任何作。

何



