

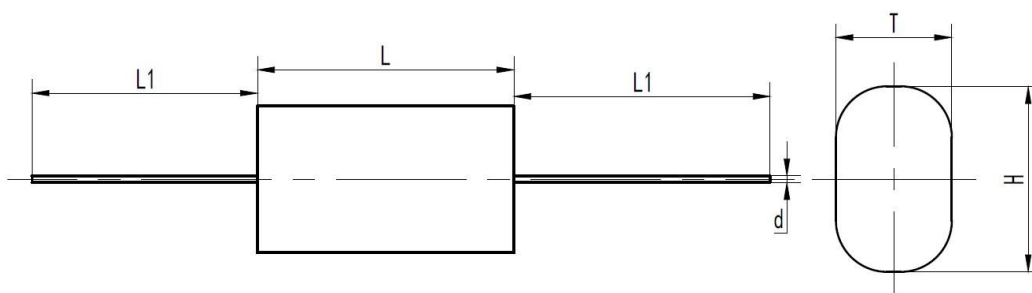


0 D

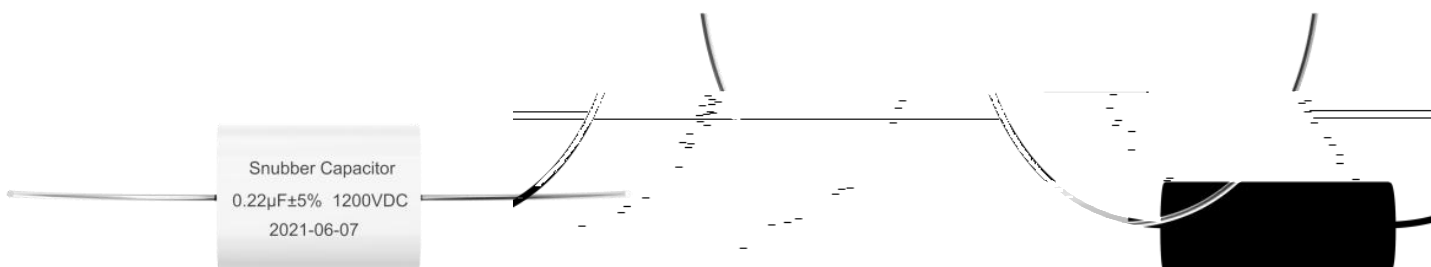

A

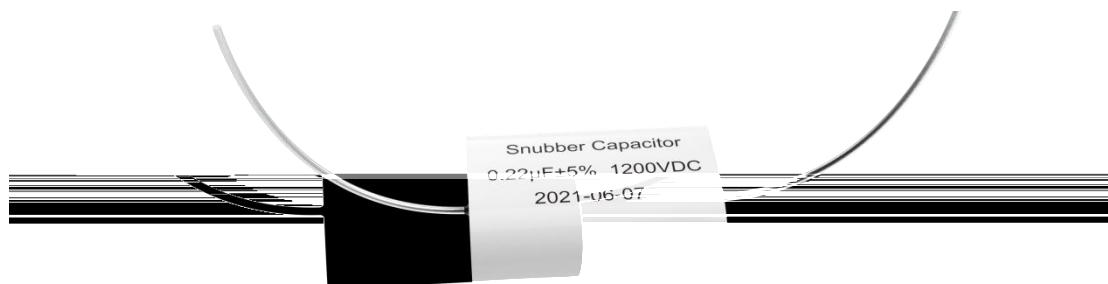

S



SCR

IGB



I

-

E

B

A

C

H

IGB

F



D

-



,



C



E

-

I



C

-

I

I

M

I M



10


10

M

:

***:

1	2	3	4	5	6	7	8	9	10
C		3K0			1	7	4	0	1

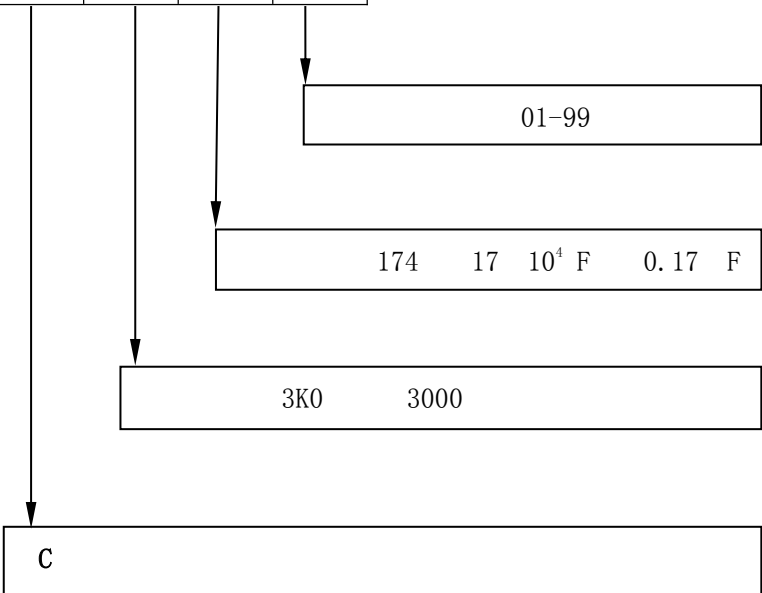

C3K0174**
3000 0.17 F



		GB/ 17702	IEC 61071, GB/ 2693	IEC 60384-1
C	C	40/105/56		
0		-40 85 (+85 ())	+85 :	(+75 ())
		+85 :	()	
		700	1000	1200 1700
	85	2000	3000	5000
C		0.1~8μF		
C		±2% (G), ±3% (H), ±5% (J), ±10% (K), ±20% (M)		
		1.5	N 10 20	5
I		5 HøAž'BS bI*u1~ l'D1 —E1		



		13.9	21.9	5.7		325	325	9	
		16.3	27.5	5.3		325	488	12	
		19.5	30.7	5.2		325	650	12	
		20.7	31.9	4.8		325	715	12	
		16.3	27.5	4.6		240	528	12	
		22.4	33.6	4.5		325	813	12	
		17.7	28.9	4.5		240	600	12	
		25.0	36.2	4.3		325	975	12	
		19.8	31.0	4.3		240	720	12	
		26.4	37.6	4.6		325	1073	12	
		21.8	33.0	4.2		240	840	12	
		23.6	34.8	4.2		240	960	12	
		26.0	37.2	4.2		240	1128	12	
		28.8	40.0	3.8		240	1344	12	

0.47	44	17.5	12.8	7.7		570	268	9	
0.68	44	20.8	14.6	7.0		570	388	9	
1.0	44	25.0	18.6	6.8		570	570	12	
1.5	44	30.3	23.9	6.8		570	855	12	
1.5	57	25.2	18.9	6.8		340	510	12	
2.0	57	29.0	22.6	6.0		340	680	12	
2.2	57	30.3	23.9	5.9		340	748	12	
3.0	57	35.3	28.7	5.4		340	1020	12	
3.3	57	36.9	32.9	5.1		340	1122	12	



0.33	44	11.6	19.6	10.2		650	215	9	
0.47	44	14.4	22.4	10.2		650	306	9	
0.68	44	16.5	27.7	6.3	23	650	442	12	
1.0	44	21.0	32.2	6.2		650	650	12	
1.0	57	16.5	27.7	6.8		385	385	12	
1.2	44	23.4	34.6	6.0		650	780	12	
1.2	57	18.5	29.7	6.4		385	462	12	
1.5	44	26.8	38.0	6.7		650	975	12	
1.5	57	21.3	32.5	6.0		385	578	12	
2.0	57	25.3	36.5	5.6		385	770	12	

0.10	32	11.1	19.1	17.3		1350	135	5.7	
0.15	32	14.3	22.3	11.8		1350	203	8.0	
0.22	32	16.5	27.7	6.6	23	1350	297	9.0	
0.22	44	13.3	21.3	10.4		880	194	9.0	
0.33	44	15.6	26.8	6.9		880	290	9.0	
0.47	44	19.5	30.7	4.7		880	414	12	
0.68	44	24.4	35.6	4.5		880	598	12	
1.0	44	30.6	41.8	3.8		880	880	12	
1.0	57	24.4	35.6	3.6		610	610	12	
1.2	57	27.2	38.4	3.5		610	732	12	



0.10	32	13.1	21.1	13.8		1750	175	7.5	
0.10	44	9.6	17.6	12.4		1000	100	7	
0.15	44	12.4	20.4	8.6	23	1000	150	9	
0.22	44	15.6	23.6	8.5		1000	220	9	
0.33	44	18.4	29.6	5.2		1000	330	12	
0.47	44	23.4	34.6	5.0		1000	470	12	
0.56	44	25.9	37.1	4.9		1000	560	12	
0.56	57	20.1	31.3	5.5		640	358	12	
0.68	57	22.7	33.9	5.1		640	435	12	

